LODES

Nautilus,
Design by Andrea Tosetto

Model Nautilus

Strong design and leading-edge technology come together in this family of lamps characterised by a convex lens that projects the LED light wherever its needed or most preferred, for a truly efficient and personalised result. Versatile and dynamic, either on the wall or ceiling in a variety of versions and finishes, Nautilus lamps satisfy a full range of lighting needs, whether functional or purely decorative, in both residential and professional contexts. Nautilus is now available with a dim-to-warm function, which allows users to interact by adjusting the intensity of the LED light source from 2200 to 2700 kelvin.

Nautilus

340°
5.8 cm / 2.28"
15.5 cm / 6.1"
Ø 13.4 cm / Ø 5.27"
90°

Light source

AC LED
2700 K
12 W
995 lm
220–240 V
CRI 90
MacAdam 3–Step

(or)

AC LED
3000 K
12 W
1085 lm
220–240 V
CRI 90
MacAdam 3–Step

LED included

Structure: Metal	Code 2700 K	Code 3000 K
Matte White – 9010	16530 1027	16530 1030
Matte Black – 9005	16530 2027	16530 2030
Matte Champagne	16530 4527	16530 4530

Net weight: 1.10 kg   Parcels: 1

CE   IP20   TRIAC   220–240V
EAC   DALI CONTROLLABLE

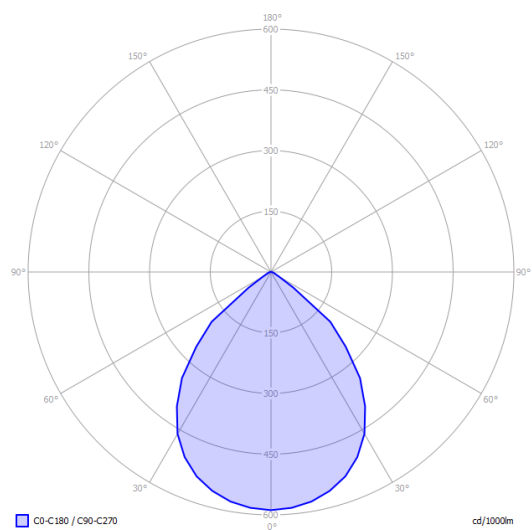### Energy efficiency class

F

Ecodesign Regulation

The LED-only light source contained in this fixture must only be replaced by the manufacturer, its support service or similarly qualified personnel.
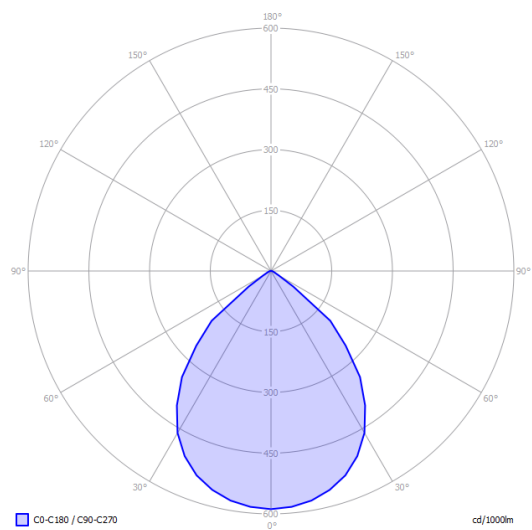
LED ⇄ LED

LODES

Nautilus

AC LED
2700 K
12 W
995 lm
220–240 V
CRI 90
MacAdam 3–Step

Photometric data

C0-C180 / C90-C270   cd/1000lm

AC LED
3000 K
12 W
1085 lm
220–240 V
CRI 90
MacAdam 3–Step

C0-C180 / C90-C270   cd/1000lm

Options of Nautilus

Nautilus Spot