LODES

Tidal,
Design by Needs Studio

Model Tidal 75

Tidal is an elegant collection of lamps with exceptional luminous efficiency. Its fluid, impactful design, inspired by the movements of celestial bodies and tides, creates a dynamic visual experience – appearing differently from various viewing angles thanks to the ring's irregular, asymmetrical shape, with one side wider than the other. Tidal emits light both downward and upward, with all technical elements concealed within the compact, slim lamp body, highlighting its aesthetic appeal.

Tidal 75

Ø 58,8 cm
Ø 23,54"

Ø 75 cm
Ø 29,53"

6,1 cm
2,40"

B

A

Light source

LED
2700 K
46 W
8589 lm
Direct light ? 700 mA
Indirect light ? 550 mA
CRI 90
MacAdam 3–Step

(or)

LED
3000 K
46 W
9072 lm
Direct light ? 700 mA
Indirect light ? 550 mA
CRI 90
MacAdam 3–Step

A 75% Emission direct light
B 25% Emission indirect light

LED and driver included

Structure: Metal

	Structure: Metal	Code 2700 K	Code 3000 K
	Matte White	19932 1027	19932 1030
	Matte Black – 9005	19932 2027	19932 2030
	Generazione scheda tecnica	19932 4527	19932 4530
	Terra	19932 6727	19932 6730

(Net weight: 5.38 kg) (Parcels: 1)

(CE) (IP20) (⊟) (⊚ TRIAC) (⚡ 220–240V)

(EAC) (DALI CONTROLLABLE)

Energy efficiency class

LODES

C

Ecodesign Regulation

The LED driver contained in this fixture must only be replaced by the manufacturer, its support service or similarly qualified personnel.

The light source contained in this device must only be replaced by the manufacturer or by the latter's assistance service or by equally specialised personnel.
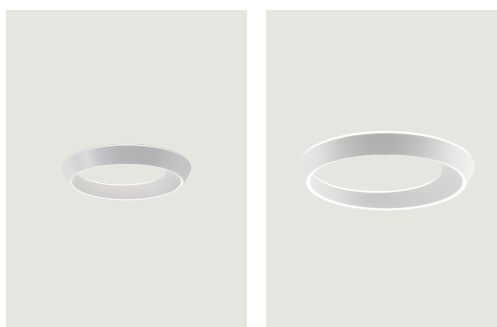
Driver Tidal 75

	2700 K	3000 K
Il driver in dotazione presenta una tensione di uscita di 700 mA, tuttavia può essere regolato durante l'installazione:	500 mA 39 W – 6855 lm 550 mA 43 W – 7289 lm 600 mA 47 W – 7722 lm	500 mA 39 W – 7236 lm 550 mA 43 W – 7695 lm 600 mA 47 W – 8154 lm

Options of Tidal

Tidal 45

Tidal 60